


Updated design for Group Meter-Main category

100A and 200A Vertical and Horizontal Group Meter-Main families conform to NEC 2020 requirements

Eaton's B-Line series 100A and 200A Group Meter-Main families are designed to meet NEC 2020 requirements for emergency disconnects and enclosed service equipment in residential and commercial applications. This solution includes critical features to achieve

compliance to the NEC 2020 standards. The finger safe design is compliant with NEC 2020 230.62 section which helps minimize the hazard of electrical shock on the line side of the breaker. In units with multiple breakers, the separated breaker compartments meet NEC 2020

section 230.71 to help reduce the hazard of electrical shock when operating on a breaker in a multiple breaker assembly. It also includes labels to help identify emergency breaker disconnects during service entry per NEC 2020 section 230.85

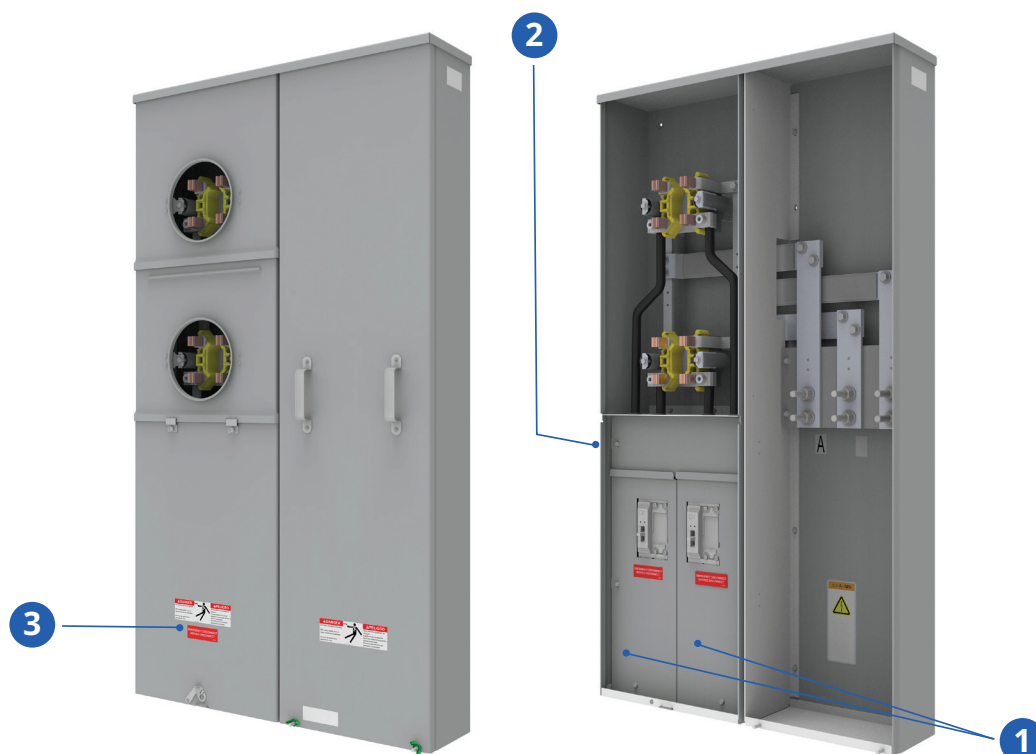

Key Safety Features

- 1 Isolated enclosures for each breaker
- 2 Finger safe barrier
- 3 Emergency disconnect

Construction

- Factory installed breakers
- Surface or flush mounting
- NEMA Type 3R
- ANSI 61 gray painted finish
- Aluminum snap ring included

Standards

- Conforms to NEC 2020
- UL 67 Listed
- ANSI C12.7
- EUSERC 342 (Vertical)
- NEMA Type 3R



Powering Business Worldwide



Eaton.com/meter-mounts

Updated design for Group Meter-Main category

100 Amp Vertical Group Meter Mains without Bypass

Catalog #	# of Positions	Buss Amps	Amp Rating	Jaws	Service Type	Access	AIC	Main Breaker Provisions	Overall Dimension		
									Height	Width	Depth
2012 MS60	2	225	100	4	1Ø/3W	OH/UG	10K	(2) 2P	34"	22"	6"
2012 F	2	225	100	4	1Ø/3W	UG	10K	(2) 2P	34"	22"	6"
2013 MS60	3	225	100	4	1Ø/3W	OH/UG	10K	(3) 2P	39-1/2"	22"	6"
2013 F	3	225	100	4	1Ø/3W	UG	10K	(3) 2P	39-1/2"	22"	6"
2014	4	400	100	4	1Ø/3W	UG	10K	(4) 2P	34"	32"	6"
2014 F	4	400	100	4	1Ø/3W	UG	10K	(4) 2P	34"	32"	6"
2015	5	400	100	4	1Ø/3W	UG	10K	(5) 2P	39-1/2"	32"	6"
2015 F	5	400	100	4	1Ø/3W	UG	10K	(5) 2P	39-1/2"	32"	6"
2016	6	400	100	4	1Ø/3W	UG	10K	(6) 2P	39-1/2"	32"	6"
2016 F	6	400	100	4	1Ø/3W	UG	10K	(6) 2P	39-1/2"	32"	6"

100 Amp Horizontal Group Meter Mains with Bypass

Catalog Number	Number of Positions	Buss Amps	Amp Ratings	Jaws	Service Type	Access	Voltage	Main Breaker		Bypass	Overall Dimension		
								AIC	Main		Height	Width	Depth
152 MCCM	2	225	100	4	1Ø/3W	OH/UG	120/240	10K	(2) 100A, 2P	MCC	28-1/2"	26-1/2"	4-5/8"
153 MCCM	3	225	100	4	1Ø/3W	OH/UG	120/240	10K	(3) 100A, 2P	MCC	28-1/2"	34-3/4"	4-5/8"
154 MCCM	4	225	100	4	1Ø/3W	OH/UG	120/240	10K	(4) 100A, 2P	MCC	28-1/2"	43"	4-5/8"

200 Amp Vertical Group Meter Mains without Bypass

Catalog Number	Number of Positions	Buss Amps	Amp Ratings	Jaws	Service Type	Access	Voltage	Main Breaker		Height	Width	Depth
								AIC	Main			
2222	2	400	200	4	1Ø/3W	UG	120/240	10K	(2) 200A, 2P	48"	26-5/8"	6"
2223	3	400	200	4	1Ø/3W	UG	120/240	10K	(3) 200A, 2P	48"	40-3/4"	6"
2224	4	600	200	4	1Ø/3W	UG	120/240	10K	(4) 200A, 2P	48"	40-3/4"	6"

Main Breaker Data

Catalog #	B-Line Breaker #	Eaton Breaker #	ITE Breaker #	Ampacity	# Poles	AIC
152 MCCM	28108	BR2100	-	100A	2P	10K
153 MCCM	28108	BR2100	-	100A	2P	10K
154 MCCM	28108	BR2100	-	100A	2P	10K
2222	25508K	-	QR22B200	200A	2P	10K
2223	25508K	-	QR22B200	200A	2P	10K
2224	25508K	-	QR22B200	200A	2P	10K

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2024 Eaton
All Rights Reserved
Printed in USA
Publication No. SA307011EN
May 2024



Eaton is a registered trademark.
All other trademarks are property of their respective owners.



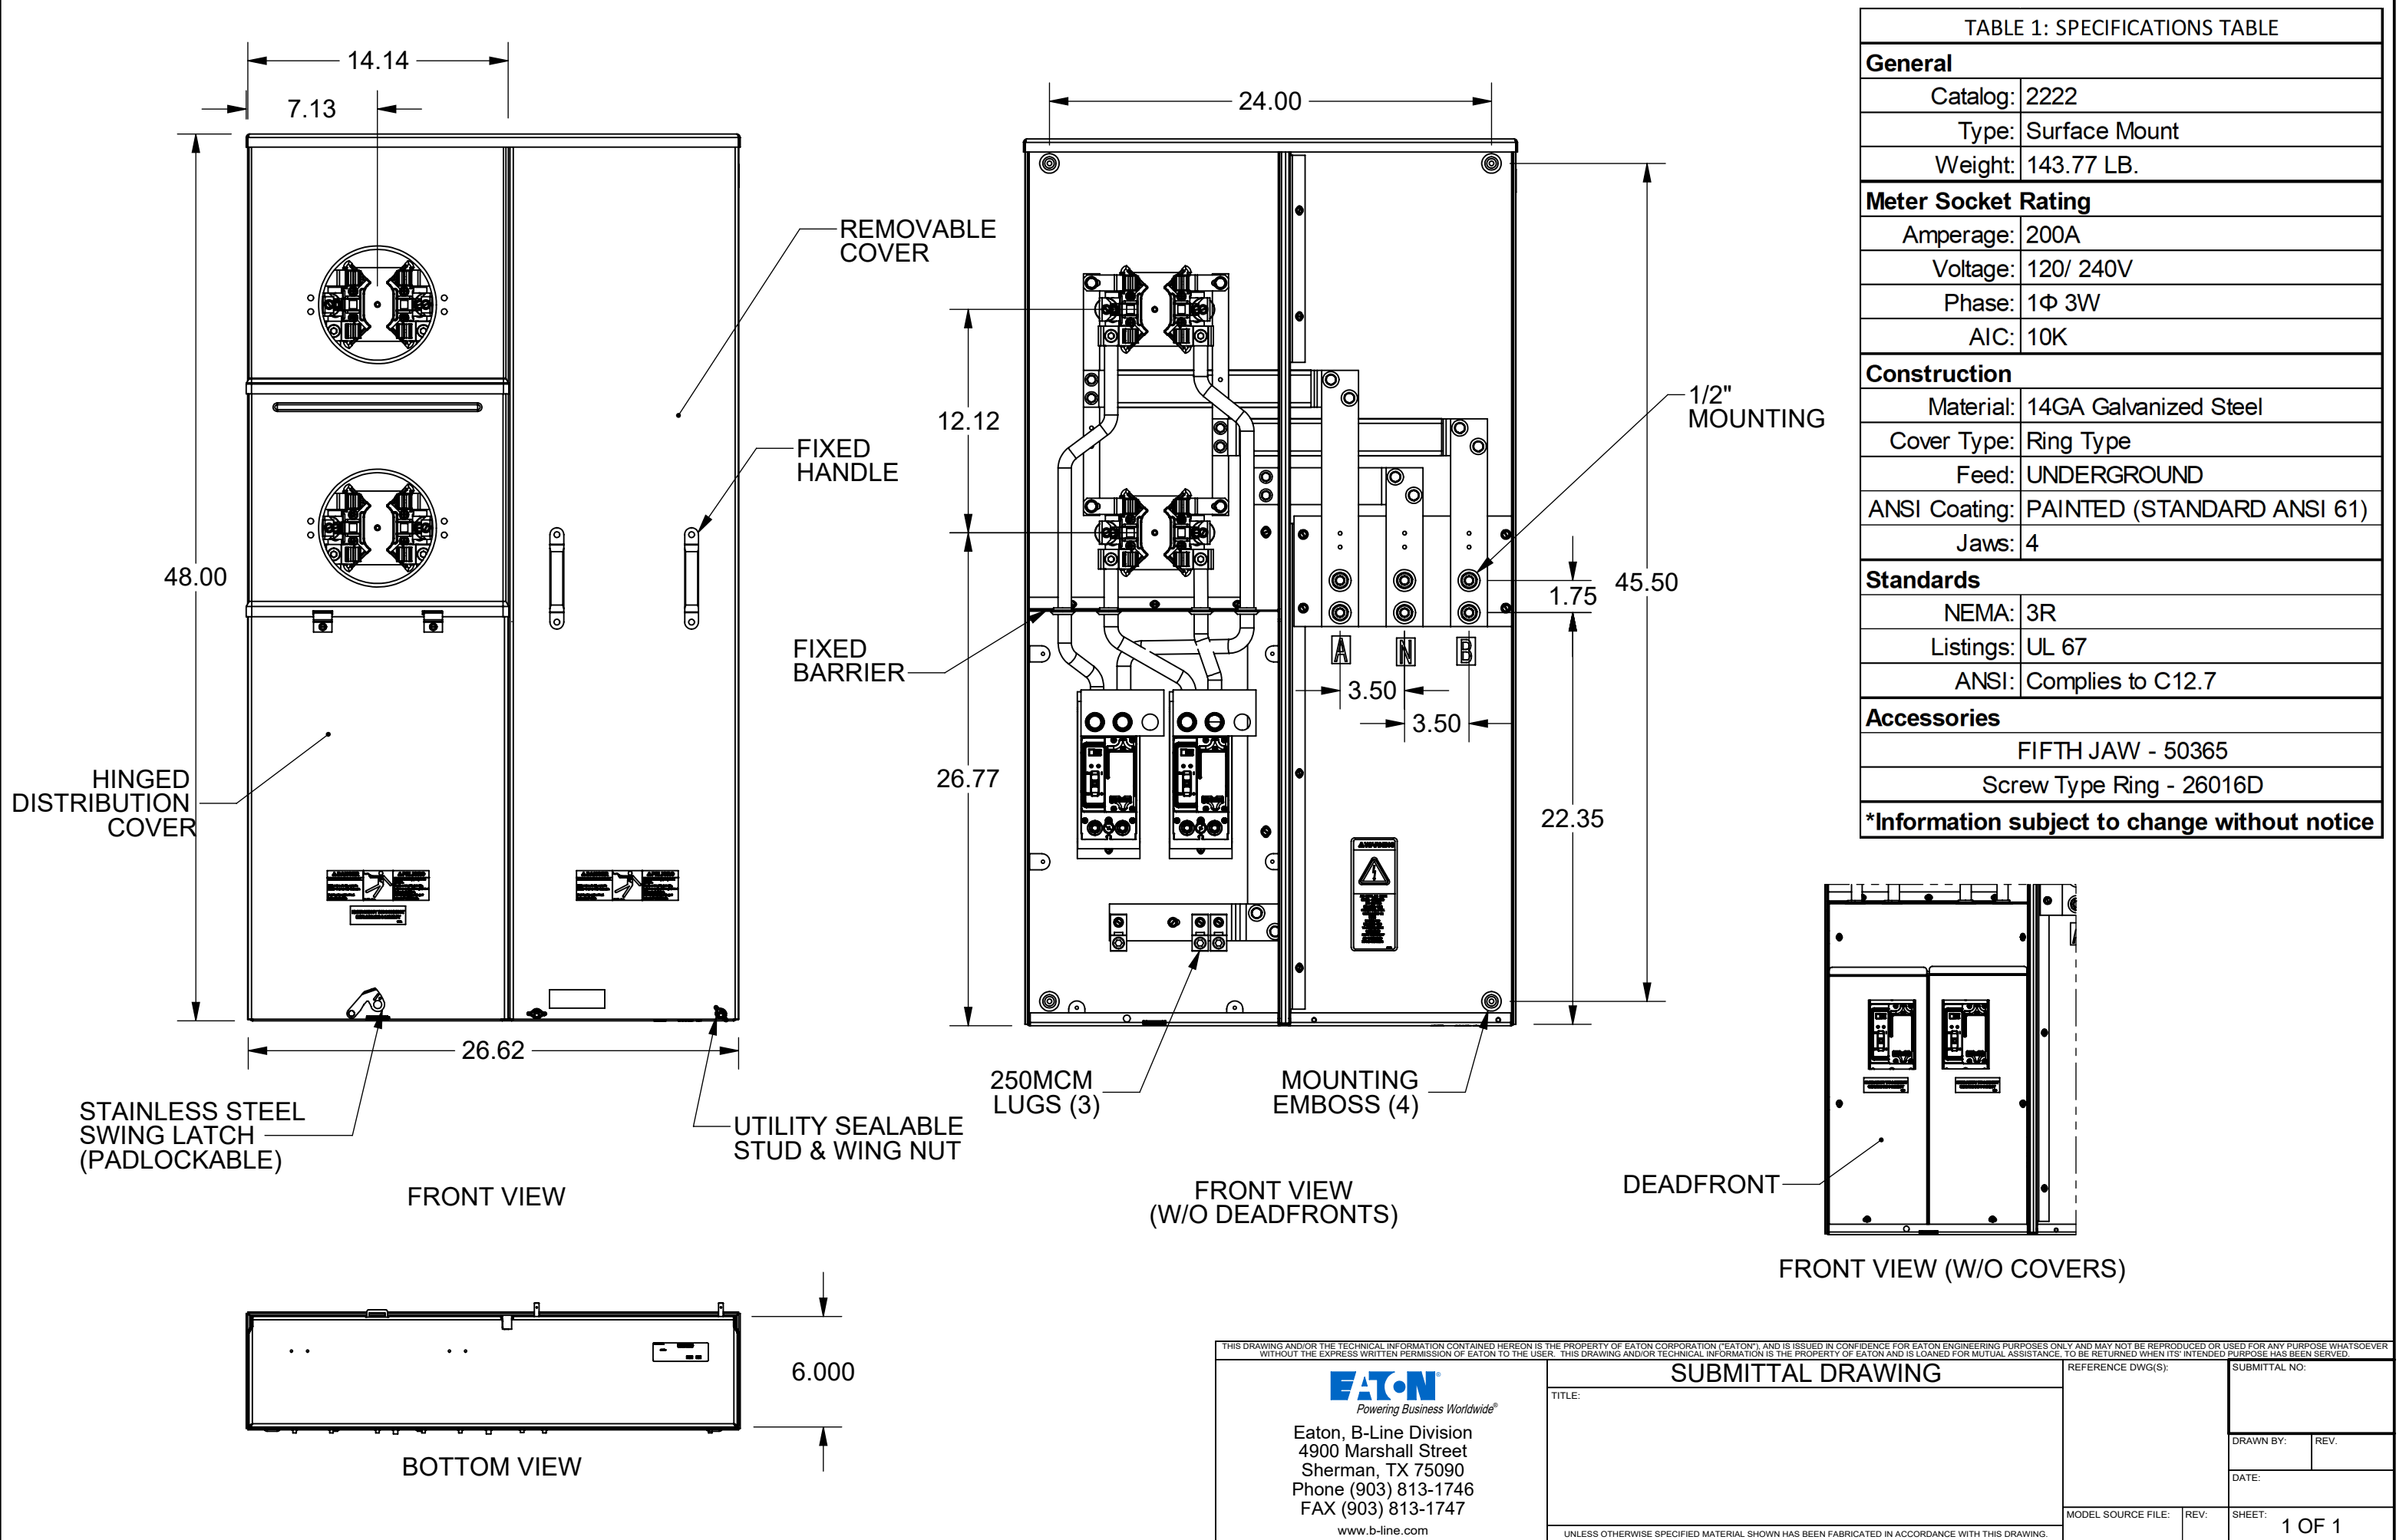


TABLE 1: SPECIFICATIONS TABLE	
General	
Catalog:	2222
Type:	Surface Mount
Weight:	143.77 LB.
Meter Socket Rating	
Amperage:	200A
Voltage:	120/ 240V
Phase:	1Φ 3W
AIC:	10K
Construction	
Material:	14GA Galvanized Steel
Cover Type:	Ring Type
Feed:	UNDERGROUND
ANSI Coating:	PAINTED (STANDARD ANSI 61)
Jaws:	4
Standards	
NEMA:	3R
Listings:	UL 67
ANSI:	Complies to C12.7
Accessories	
FIFTH JAW - 50365	
Screw Type Ring - 26016D	
*Information subject to change without notice	

THIS DRAWING AND/OR THE TECHNICAL INFORMATION CONTAINED HEREON IS THE PROPERTY OF EATON CORPORATION ("EATON"), AND IS ISSUED IN CONFIDENCE FOR EATON ENGINEERING PURPOSES ONLY AND MAY NOT BE REPRODUCED OR USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE EXPRESS WRITTEN PERMISSION OF EATON TO THE USER. THIS DRAWING AND/OR TECHNICAL INFORMATION IS THE PROPERTY OF EATON AND IS LOANED FOR MUTUAL ASSISTANCE, TO BE RETURNED WHEN ITS INTENDED PURPOSE HAS BEEN SERVED.			
EATON Powering Business Worldwide® Eaton, B-Line Division 4900 Marshall Street Sherman, TX 75090 Phone (903) 813-1746 FAX (903) 813-1747 www.b-line.com		SUBMITTAL DRAWING	
TITLE:		REFERENCE DWG(S):	SUBMITTAL NO:
UNLESS OTHERWISE SPECIFIED MATERIAL SHOWN HAS BEEN FABRICATED IN ACCORDANCE WITH THIS DRAWING.		DRAWN BY:	REV:
		DATE:	
		MODEL SOURCE FILE:	SHEET: 1 OF 1